
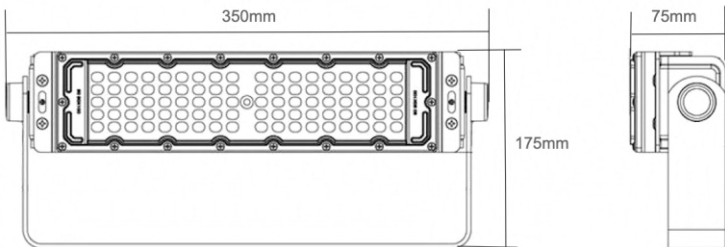
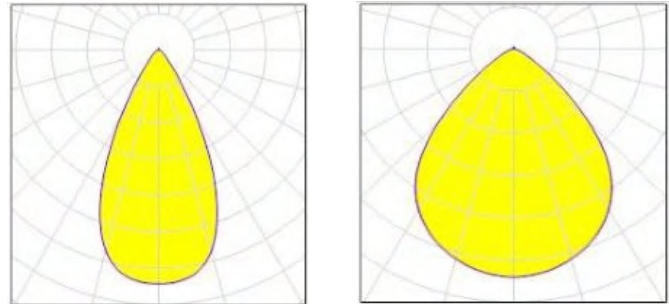




GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS


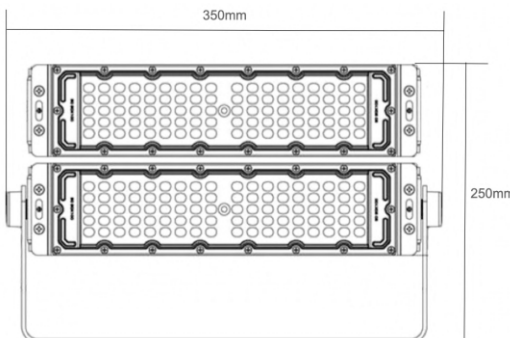
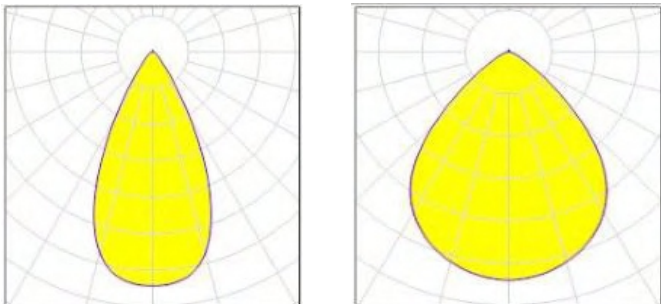
Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com

		50W LED FLOODLIGHT	
		ItemNo.	15-06-0001
OpticalData		ElectricalData	
LEDType	Phillips Lumileds 3030	PowerSupply	MeanWell ELG
SystemEfficacy	130lm/W ± 10% (CCT=5000K Ra70)	InputVoltage	90-305VAC
LuminousFlux	6500lm ± 5% (CCT=5000K Ra70)	FrequencyRange	50/60Hz
CCT	3000K, 4000K, 5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%
Others			
SystemPowerConsumption	50±3W	JunctionTemperature(Tj)	<70°C (Ta=30°C)
LEDPowerConsumption	48±3W	StorageTemperature	-40°C to +70°C (-104°F to +158°F)
FixtureMaterial	Aluminum Alloy	OperatingTemperature	-30°C to +50°C (-22°F to +122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	3.1±0.3kg (6.83±0.66Lbs)	OutlookDimensions	175×350×75mm (6.89"×13.78"×2.95")
LifeSpan	>50000Hrs (Ta=30°C@L70)	ExportCartonSize	220×400×160mm (8.66"×15.75"×6.3")
OptionalInfo.			
InstallationMethods	Ceiling Mounting/Wall Mounting/Ground Mounting		
FixtureColor	Silver Body		
DimmingFunction	DALI Control/Microwave Sensor/Zigbee Wireless Control		
PhysicalDimensions		LightDistributionCurve	
			



GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS


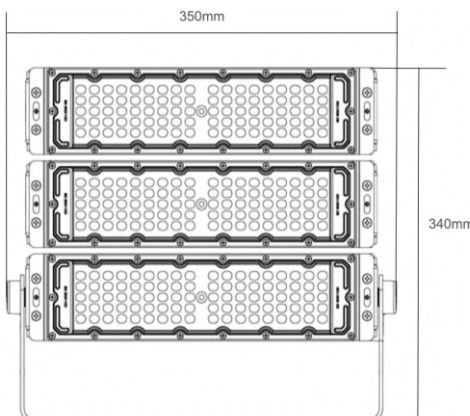
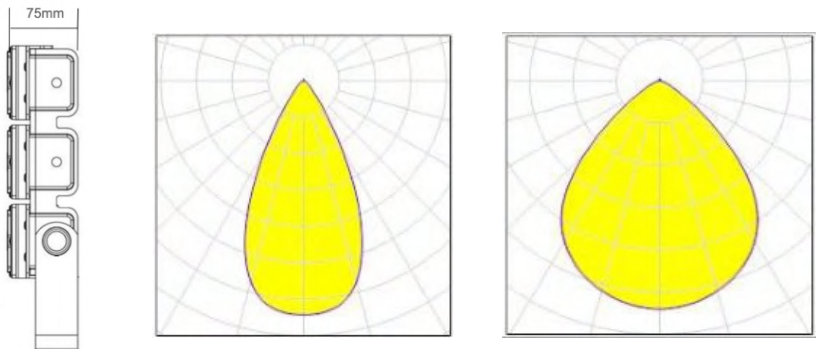
Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com

		100W LED FLOODLIGHT	
		ItemNo.	15-06-0002
OpticalData		ElectricalData	
LEDType	Phillips Lumileds 3030	PowerSupply	MeanWell ELG
SystemEfficacy	130lm/W±5%(CCT=5000K)	InputVoltage	90-305VAC
LuminousFlux	13000lm±5%(CCT=5000K)	FrequencyRange	50/60Hz
CCT	3000K,4000K,5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%
Others			
SystemPowerConsumption	100±3W	JunctionTemperature(Tj)	<70°C(Ta=30°C)
LEDPowerConsumption	98±3W	StorageTemperature	-40°Cto+70°C(-104°Fto+158°F)
FixtureMaterial	AluminumAlloy	OperatingTemperature	-30°Cto+50°C(-22°Fto+122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	3.8±0.3kg(8.38±0.66Lbs)	OutlookDimensions	250×350×75mm (9.84"×13.78"×2.95")
LifeSpan	>50000Hrs(Ta=30°C@L70)	ExportCartonSize	220×400×160mm (8.66"×15.75"×6.3")
OptionalInfo.			
InstallationMethods	CellingMounting/WallMounting/GroudMounting		
FixtureColor	SliverBody		
IntelligentControl	DALIControl/MicrowaveSensor/ZigbeeWirelessControl		
PhysicalDimensions		LightDistributionCurve	
			



GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS


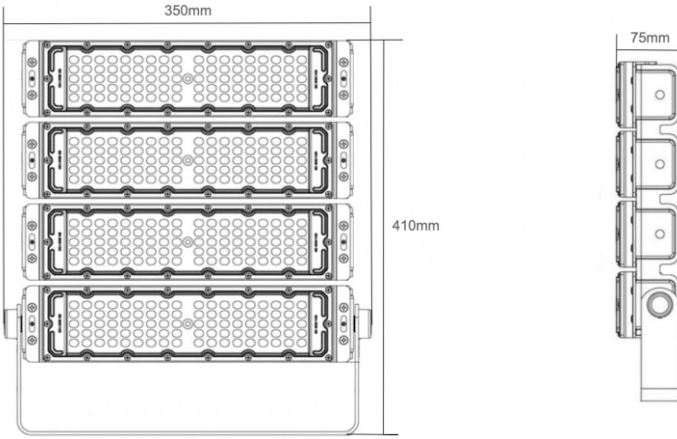
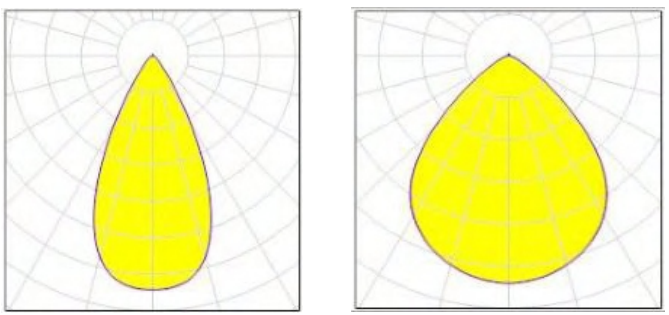
Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com

		150W LED FLOODLIGHT	
		ItemNo.	15-06-0003
OpticalData		ElectricalData	
LEDType	Phillips Lumileds 3030	PowerSupply	MeanWell ELG
SystemEfficacy	130lm/W±5%(CCT=5000K)	InputVoltage	90-305VAC
LuminousFlux	19500lm±5%(CCT=5000K)	FrequencyRange	50/60Hz
CCT	3000K,4000K,5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%
Others			
SystemPowerConsumption	150±3W	JunctionTemperature(Tj)	<70°C(Ta=30°C)
LEDPowerConsumption	147±3W	StorageTemperature	-40°Cto+70°C(-104°Fto+158°F)
FixtureMaterial	AluminumAlloy	OperatingTemperature	-30°Cto+50°C(-22°Fto+122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	4.8±0.3kg(10.58±0.66Lbs)	OutlookDimensions	340×350×75mm (13.39"×13.78"×2.95")
LifeSpan	>50000Hrs(Ta=30°C@L70)	ExportCartonSize	310×380×160mm (12.2"×14.96"×6.3")
OptionalInfo.			
InstallationMethods	CellingMounting/WallMounting/GroudMounting		
FixtureColor	SliverBody		
IntelligentControl	DALIControl/MicrowaveSensor/ZigbeeWirelessControl		
PhysicalDimensions		LightDistributionCurve	
			



GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS

Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com

		200W LED FLOODLIGHT	
		ItemNo.	15-06-0004
OpticalData		ElectricalData	
LEDType	Phillips Lumileds 3030	PowerSupply	MeanWell ELG
SystemEfficacy	130lm/W±5%(CCT=5000K)	InputVoltage	90-305VAC
LuminousFlux	26000lm±5%(CCT=5000K)	FrequencyRange	50/60Hz
CCT	3000K,4000K,5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%
Others			
SystemPowerConsumption	200±3W	JunctionTemperature(Tj)	<70°C(Ta=30°C)
LEDPowerConsumption	197±3W	StorageTemperature	-40°Cto+70°C(-104°Fto+158°F)
FixtureMaterial	AluminumAlloy	OperatingTemperature	-30°Cto+50°C(-22°Fto+122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	6.5±0.3kg(14.33±0.66Lbs)	OutlookDimensions	410×350×75mm (16.14"×13.78"×2.56")
LifeSpan	>50000Hrs(Ta=30°C@L70)	ExportCartonSize	380×380×160mm (14.96"×14.96"×6.3")
OptionalInfo.			
InstallationMethods	CellingMounting/WallMounting/GroudMounting		
FixtureColor	SliverBody		
IntelligentControl	DALIControl/MicrowaveSensor/ZigbeeWirelessControl		
PhysicalDimensions		LightDistributionCurve	
			



GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS

Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com



300W LED FLOODLIGHT

ItemNo.

15-06-0005

OpticalData

ElectricalData

LEDType	PhillipsLumileds3030	PowerSupply	MeanWellELG
SystemEfficacy	130lm/W±5%(CCT=5000K)	InputVoltage	90-305VAC
LuminousFlux	39000lm±5%(CCT=5000K)	FrequencyRange	50/60Hz
CCT	3000K,4000K,5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%

Others





SystemPowerConsumption	300±3W	JunctionTemperature(Tj)	<70°C(Ta=30°C)
LEDPowerConsumption	294±3W	StorageTemperature	-40°Cto+70°C(-104°Fto+158°F)
FixtureMaterial	AluminumAlloy	OperatingTemperature	-30°Cto+50°C(-22°Fto+122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	9.8±0.3kg(21.6±0.66Lbs)	OutlookDimensions	340×700×75mm (13.39"×27.56"×2.56")
LifeSpan	>50000Hrs(Ta=30°C@L70)	ExportCartonSize	340×690×160mm (13.39"×27.17"×6.3")

OptionalInfo.

InstallationMethods	CellingMounting/WallMounting/GroudMounting
FixtureColor	SliverBody
IntelligentControl	DALIControl/MicrowaveSensor/ZigbeeWirelessControl

PhysicalDimensions


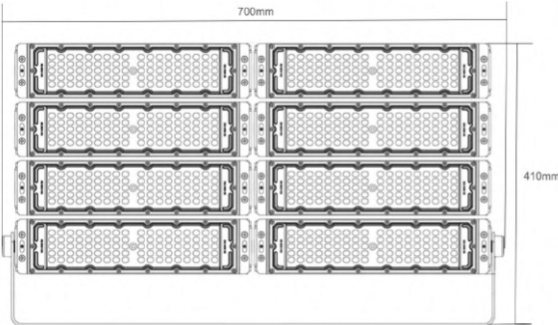
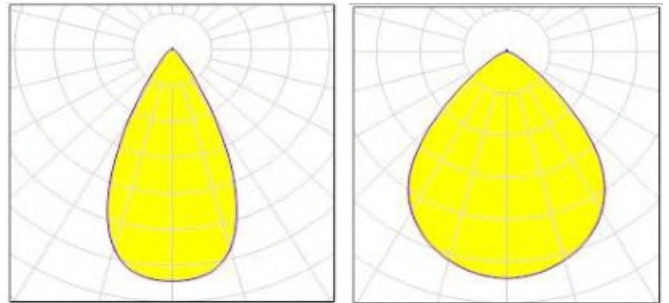
LightDistributionCurve

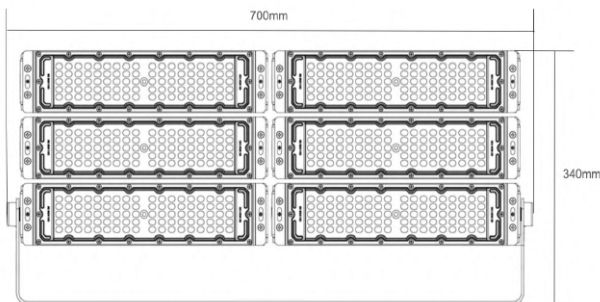



GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS


Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com

		400W LED FLOODLIGHT	
		ItemNo.	15-06-0006
OpticalData		ElectricalData	
LEDType	Phillips Lumileds 3030	PowerSupply	MeanWell ELG
SystemEfficacy	130lm/W±5%(CCT=5000K)	InputVoltage	90-305VAC
LuminousFlux	52000lm±5%(CCT=5000K)	FrequencyRange	50/60Hz
CCT	3000K,4000K,5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%
Others			
SystemPowerConsumption	400±3W	JunctionTemperature(Tj)	<70°C(Ta=30°C)
LEDPowerConsumption	394±3W	StorageTemperature	-40°Cto+70°C(-104°Fto+158°F)
FixtureMaterial	AluminumAlloy	OperatingTemperature	-30°Cto+50°C(-22°Fto+122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	13±0.3kg(21.6±0.66Lbs)	OutlookDimensions	410×700×75mm (16.14"×27.56"×2.95")
LifeSpan	>50000Hrs(Ta=30°C@L70)	ExportCartonSize	420×690×160mm (16.54"×27.17"×6.3")
OptionalInfo.			
InstallationMethods	CeilingMounting/WallMounting/GroundMounting		
FixtureColor	SilverBody		
IntelligentControl	DALIControl/MicrowaveSensor/ZigbeeWirelessControl		
PhysicalDimensions		LightDistributionCurve	
			



GLOBAL AXIS CO. LLC
LED LIGHTS & SOLAR SOLUTIONS

Address: P.O Box 1604, PC 130, Azaiba
Sultanate of Oman
Tel: +968 96786036
Website: www.gaxisintl.com

		500WLED FLOODLIGHT	
		ItemNo.	15-06-0007
OpticalData		ElectricalData	
LEDType	PhillipsLumileds3030	PowerSupply	MeanWellELG
SystemEfficacy	130lm/W±5%(CCT=5000K)	InputVoltage	90-305VAC
LuminousFlux	65000lm±5%(CCT=5000K)	FrequencyRange	50/60Hz
CCT	3000K,4000K,5000K	OutputVoltage	28.8~48VDC
BeamAngle	60°, 90°	SurgeProtection	10KV
CRI	Ra70/Ra80	PowerEfficiency	>95%
SystemEfficiency	>90%	PowerFactor	>0.95
		TotalHarmonicDistortion	<15%
Others			
SystemPowerConsumption	500±3W	JunctionTemperature(Tj)	<70°C(Ta=30°C)
LEDPowerConsumption	493±3W	StorageTemperature	-40°Cto+70°C(-104°Fto+158°F)
FixtureMaterial	AluminumAlloy	OperatingTemperature	-30°Cto+50°C(-22°Fto+122°F)
IngressProtection	IP65	OperatingHumidity	15~90%RH
LuminaireNetWeight	16±0.3kg(38.27±0.66Lbs)	OutlookDimensions	485×700×75mm (19.09"×27.56"×2.56")
LifeSpan	>50000Hrs(Ta=30°C@L70)	ExportCartonSize	580×690×160mm (22.83"×27.17"×6.3")
OptionalInfo.			
InstallationMethods	CeilingMounting/WallMounting/GroudMounting		
FixtureColor	SliverBody		
IntelligentControl	DALIControl/MicrowaveSensor/ZigbeeWirelessControl		
PhysicalDimensions		LightDistributionCurve	
